

23AWG CAT8 S/FTP LAN CABLE

TMT Global cat8 23awg 4 twisted pair S-FTP Network Cable 305m are Manufactured Tested and Complied with IEC 60332-1-2 EN 50173-1:2011 ISO/IEC11801:2011(Ed. 2.2) ANSI/TIA/EIA-568.2-D IEC61935-2:2010(Ed.3.0) EN 50173-2:2007 including Amendment A1:2010 Requirements for Patch Cord Assemblies and Provide High Performance levels for structured cabling systems.

General Specification:

4 Pairs UnShielded Twisted Pair (SFTP) Cable

Gold Plated: 30U"

Color Code: Aqua/Black/Blue/green/Grey/Orange/Red/Violet/White/Yellow r custom color

Length : 0.12/0.15/0.50/1/2/3/5/8/10/15/20/25/30/40/50/70/100/meter r custom Length

Contact blade: Phosphor Bronze

Insulation Material: HD-PE-PVC-LSZH

Jacket Material: PVC UL94V-0

APPLICATION

10BASE-T, 100BASE-TX Fast Ethernet,

1000BASE-T (IEEE802.3

100VG-AnyLAN (IEEE802.12)

550 MHz Broadband Video

Voice, T1, ISDN

155/ 622 Mbps ATM

Power over Ethernet (POE)

PHYSICAL AND MECHANICAL PROPERTIES

Conductor Resistance: $\leq 5\Omega - \leq 20\Omega$

Insulation Resistance: $\geq 10M\Omega$

Characteristic Impedance: 100 — 6 Ohm @ 1-250MHz -1-500 MHz

Contact Resistance: 20 m Ohm max

Resistance Unbalance: 2% max

Dielectric strength: 1000 volts/1 minute min rms

Cable to Plug Tensile Strength: 9 Kgf (90N) min


Durability: 750

Temperature Operating Range: -25°C to 70°C


Country Of Origin: Made in UAE

By Fahad Cables Industry FZE

23AWG CAT8 S/FTP



COPPER CONDUCTOR
HDPE INNER JACKET
PAIR DIVIDER
RIP CORD
ALUMINUM PAIR FOIL
OVER ALL BRAID SHIELD
OUTER JACKET

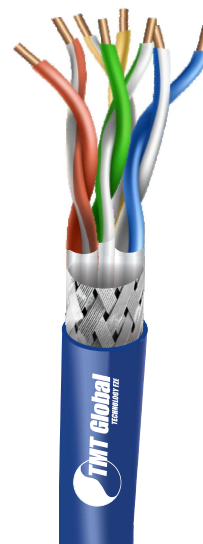

Middle East Office

TMT GLOBAL TECHNOLOGY

Mob: +971-54-7069701

Email: info@tmtuae.com

Web: www.tmtuae.com

Location: Maliha Road Industrial Area 18
Showroom 2 Sharjah (United Arab emirates)

UK Office

TMT GLOBAL TECHNOLOGY LTD (UK)

Company no: 07187773

Email: info@tmtglobal.co.uk

Web: www.tmtglobal.co.uk

Location: 120 Baker Street, 3rd Floor, London,
England, W1U 6TU, United Kingdom



23AWG CAT8 S/FTP LAN CABLE

TMT Global cat8 23awg 4 twisted pair S-FTP Network Cable 305m are Manufactured Tested and Complied with IEC 60332-1-2 EN 50173-1:2011 ISO/IEC11801:2011(Ed. 2.2) ANSI/TIA/EIA-568.2-D IEC61935-2:2010(Ed.3.0) EN 50173-2:2007 including Amendment A1:2010 Requirements for Patch Cord Assemblies and Provide High Performance levels for structured cabling systems.

PHYSICAL AND MECHANICAL PROPERTIES	
Basic Conductor	23AWG Solid Bare Copper
Conductor Size	(mm) 0,63
Insulation :	Polyolefin
Number of insulated conductors :	8, twisted in 4 pairs.
Color Code of Pairs :	Blue x White, Orange x White, Green x White, Brown x White.
Individual pair shield	Laminated aluminum foil (foil face outward) providing 100% coverage.
Drain wire	yes
Overall Shield	Tin coated copper braid laid in close contact over the inner foils
Outer Jacket :	LS0H Halogen free flame retardant
Outer Jacket Color :	Black /Grey/Blue/Orange/ Green/White/Aqua/ Yello/Violet/Red
Standard Surface Marking :	Includes TMTGLOBAL P/N, cable description, Meter mark and Batch Number
Pulling force :	=13.5Mpa max.
Short Term Bend Radius :	8xOD mm
Long Term Bend Radius :	4xOD mm
Temperature operating range :	-20 to +60C

ELECTRICAL SPECIFICATIONS	
Characteristic Impedance	100±6 Ohm @ 1-2000 MHz
DC Resistance	< 2.1Ohms/30m @20?
Resistance unbalance	2% max.
Capacitance	45 pF/m nom. @ 1 KHz
Cap. Unbalance (wire to ground)	1500 pF/Km max. @ 1 KHz.
Voltage rating	72 Vdc max.
Velocity of Propagation (NVP)	70-75%

Ordering Information	
Model No	Description
8X137BLB	23 AWG 4PAIR CAT8 S/FTP CABLE LSZH

Middle East Office
TMT GLOBAL TECHNOLOGY
Mob:+971-54-7069701
Email: info@tmtuae.com
Web: www.tmtuae.com
Location: Maliha Road Industrial Area 18
Showroom 2 Sharjah (United Arab emirates)

UK Office
TMT GLOBAL TECHNOLOGY LTD (UK)
Company no:07187773
Email: info@tmtglobal.co.uk
Web: www.tmtglobal.co.uk
Location: 120 Baker Street, 3rd Floor, London,
England, W1U 6TU , United Kingdom

